



CONCRETE CRUSHER

CC 260

Great power with small size!




- Crushes concrete up to 26 cm (10,2 inches)
- Excellent performance
- Only a small carrier required
- Ideally suited for demolition in tight places
- A built-in booster makes the crusher independent of the carrier's working pressure
- Pivot for 360° rotation

darda[®]
We've got the power.

CONCRETE CRUSHER

CC 260

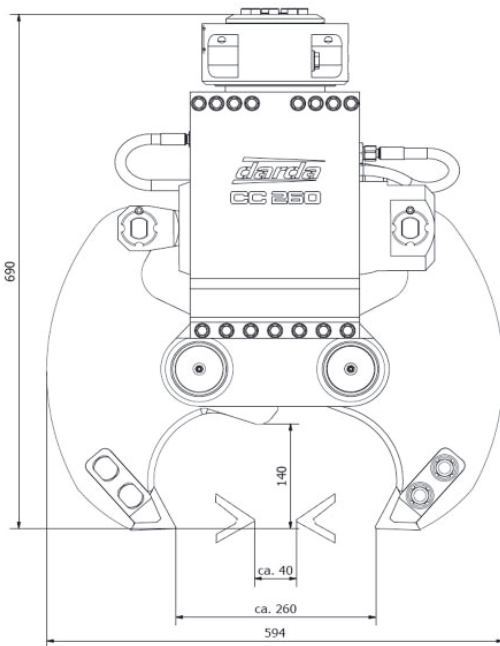

Small, compact, and simply crushing!

Specifications CC260

Measurements		
Total length ^{1,2}	690 mm	27,2 inches
Total width ¹	594 mm	23,5 inches
Total height	175 mm	7,0 inches
Maximum distance between crusher tips	260 mm	10,2 inches
Weights		
Total weight without mounting plate	69 kg	152 lbs
Maximum recommended weight of carrier ³	0,9 t	1984 lbs
Hydraulics		
Minimum pressure	15,5 MPa (155 bar)	2250 psi
Maximum pressure	18,0 MPa (180 bar)	2610 psi
Working pressure	46,5 MPa (465 bar)	6800 psi
Maximum oil flow	30 l/min	8 US gal/min
Performance		
Maximum crushing force	220 kN (22 t)	49500 lbf
Cutting force	-	-
Cutting capacity	-	-
Time to close ⁵	ca. 3 s	ca. 3 s
Time to open ⁵	ca. 2,5 s	ca. 2,5 s

¹ When completely extended. ² Without mounting plate.

³ Depends on carrying capacity table of the mini-excavator manufacturer.

⁴ Force at the crusher tips when open. ⁵ With an oil flow of approx. 30 l/min.

[Mounting plates for different carriers on request](#)



darda

We've got the power.

Darda GmbH

Im Tal 1, D-78176 Blumberg

Fon + 49 (0) 77 02 / 43 91 - 0

Fax + 49 (0) 77 02 / 43 91 - 12

info@darda.de

www.darda.de

Our distributor: